

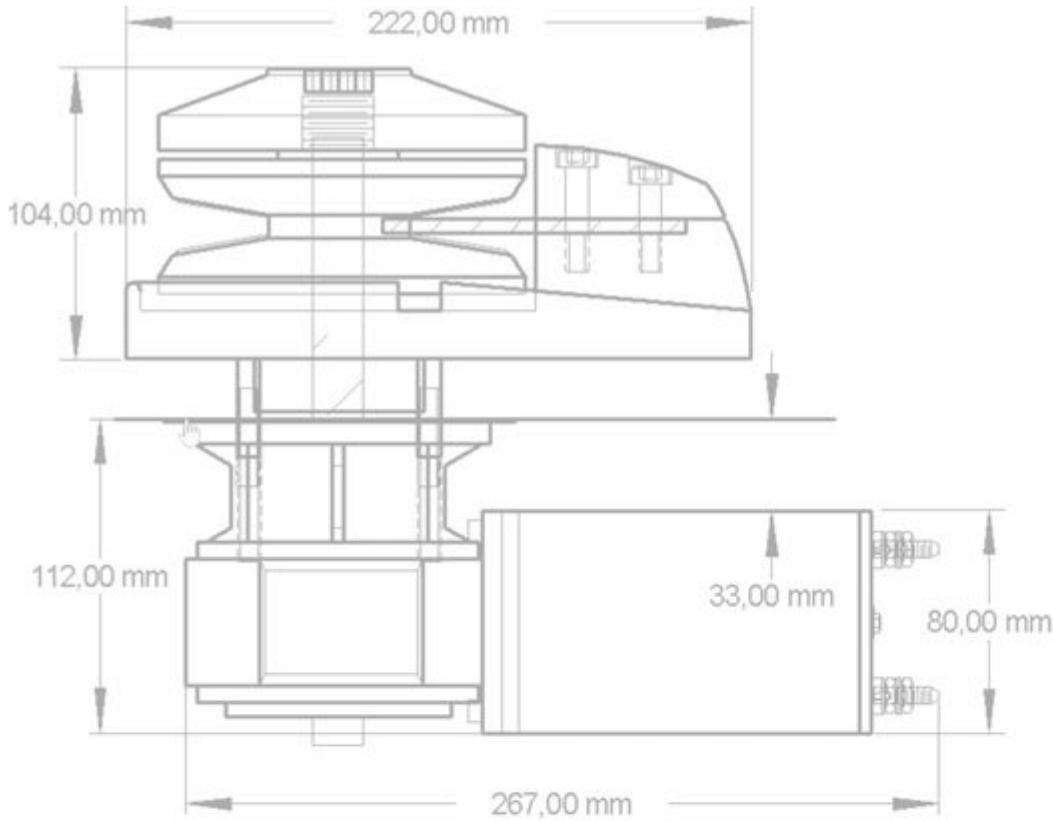


ANCHORLIFT

DIRECT

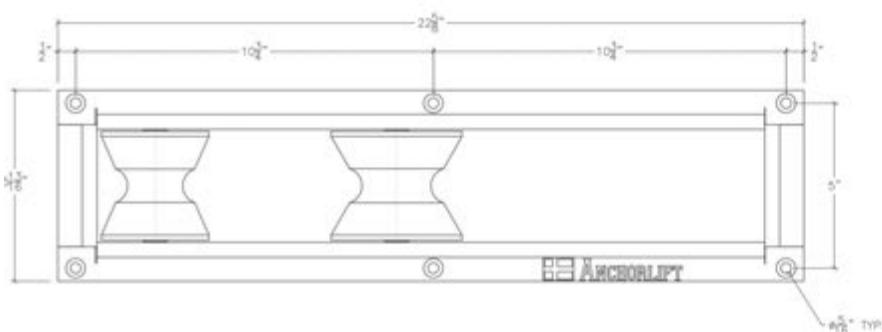

User Manual and Installation Guide

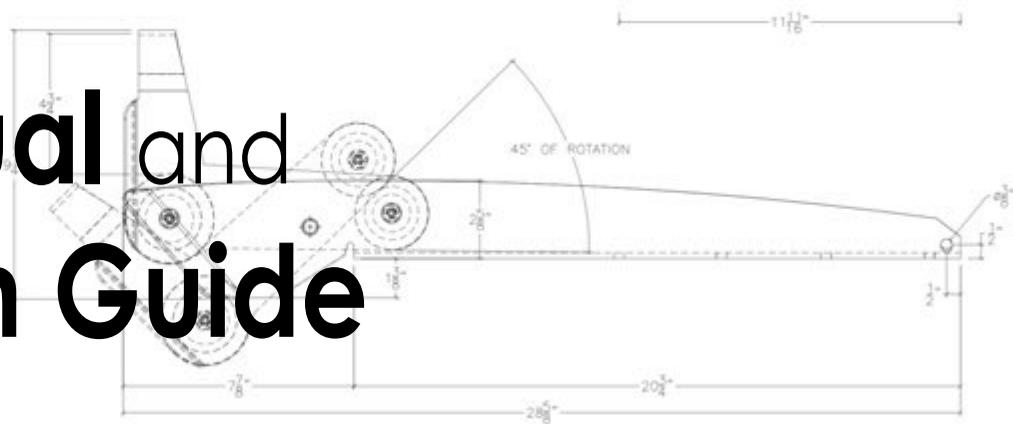

Our Anchorlift windlass and accessories are heralded for their durability and performance. Based on an all Stainless Steel AISI 316L production platform, we take great pride in providing products that will endure the test of time and the harsh elements they are exposed to. We back these claims with an industry leading 5 Year Warranty that reflects our pride in our products and their reliability.

For Parts and Service: www.anchorliftdirect.com



ANCHORLIFT



YOU
NEED
THIS

ANCHOR
TURNER
KIT

This kit helps your anchor twist around so it parks correctly into the bow roller every time.
NO MORE TWISTING BY HAND!

Thank you for choosing Anchorlift windlass systems. Please take the time to read the instructions contained in this User Manual & Installation Guide carefully. This will fully explain and illustrate for you the proper installation and general maintenance of your windlass for years of dependable operation.

Please ensure that you thoroughly read and understand the complete operational and safety requirements of the windlass before you begin. **READ THIS USER MANUAL THOROUGHLY BEFORE INSTALLATION OF YOUR WINDLASS!**

WARNING!

Windlasses are designed to deploy and retrieve anchors, **DO NOT** use the equipment for other purposes.

WARNING!

To avoid personal injury, keep clear of the windlass while it is operating.

WARNING!

Always secure the rode kit, chain or rope (preferably with a chain stopper) before navigation of vessel.

WARNING!

Make sure that electrical power is shut off when working on the windlass or performing maintenance.

NOTE: Improper installation will result in a void of the warranty!

Getting Started:

Check the contents of the box. The standard package consists of: Windlass deck unit, Gear Box/Motor unit, Solenoid, Clutch Handle, Mounting Hardware, Drilling Template and Quick Install Guide.



Additional products recommended for all installations: Helm Switch, Circuit Breaker, Foot Switch Kit & Radio Remote (optional).

90801



90080-90175



90900B



92004



Tools Required:

Pencil
 Drill
 Drill Bit
 Hole Saw
 Rasp / File
 Metric wrench set
 Metric Allen wrench set
 Pliers
 Wire Snips/Crimps

Deck Thickness:

Barracuda: 20 - 40mm, 3/4" - 1 1/2"

Dolphin: 25 - 50mm, 1" - 2"


Mako: 25mm to 65mm, 1" - 2.5"

Aquarius: up to 190mm / 7.5"

Note: For deck thickness greater than the maximum measures mentioned here please contact Anchorlift Customer Support for available options.

Supplies Needed:

Masking Tape
 Marine Grease (Blue waterproof)
 Thread locker (Red Loc-Tite® or similar)

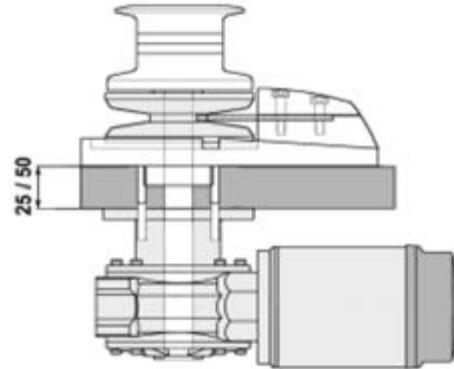

The Gear Box is fitted with a removable mounting flange that can be mounted on both sides of the gear box. It's important that the motor is mounted as far away from the chain pipe hole as possible. See illustrations below:

Photos of motor gear box installations

**IMPORTANT!!**


Protect the gear box and electric motor with suitable anti-corrosion spray such as CRC® Heavy Corrosion Inhibitor, Corrosion X®, Tectyl® or similar product. See pictures P 1 & P 2.

DIRECT

Preparation:

The windlass is to be placed in the correct position by aligning the gypsy with the bow. The rope or chain needs to be level with the deck and wound around the gypsy at an angle of about 180 degrees.


(See photo P 3)

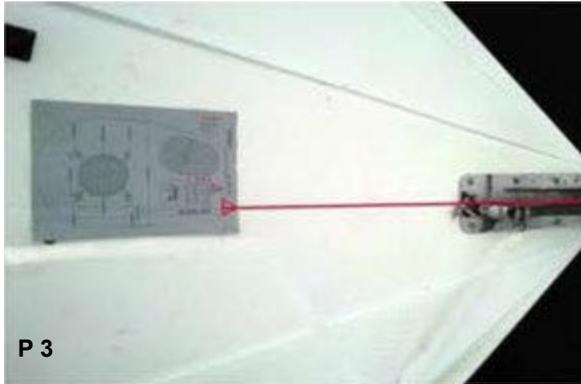


Before drilling holes, you must check the following:

1) There are to be no obstacles below the deck. There must be enough space for the chain/rope (Rode Kit) to fall properly 12-18 inches.

P 6




P 7



2) Make sure the top and bottom surfaces of the deck are as parallel as possible. If necessary, compensate for any differences to prevent windlass base & gearbox from being damaged.

P 5



3) Once the ideal position has been found, place the drilling/mounting template in position and mark all the holes. Barracuda, Dolphin & Mako models are equipped with 8mm stainless steel bolts. When installing the windlass use a 10mm drill bit for the bolt holes.

Before installing turn the windlass over and supply a suitable bead of sealant as shown below.



WARNING!

Make sure that the windlass shaft and gear box bushing are well greased with suitable marine grease before installation (See photo **P 1**).


P1.

P2.





IMPORTANT!!

Protect the gear box and electric motor with suitable anti-corrosion spray such as CRC® Heavy Corrosion Inhibitor, Corrosion X®, Tectyl® or similar product. See pictures **P 1** & **P 2**.

Make sure to position the windlass so that the center line of the chain / rope aligns with the bow roller in a horizontal plane, and that the vertical line is within 10 degrees (See photo **P 3**) of the rope / chain gypsy.

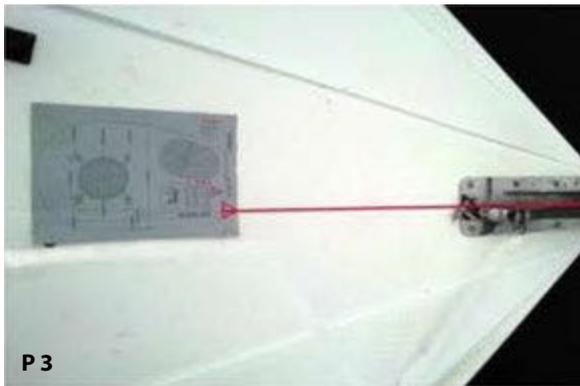

Drill and cut out holes to the size detailed on the template. Make sure that the chain pipe hole is angled and smooth to allow the chain / rope / rode kit to easily pass through it (See drawing **P 4**). Note: With a sandwiched deck construction, it is important to seal the exposed surface.

P4.

P5.

P6.

P7.


NOTE: Care should be taken when installing the windlass to ensure that the vertical drop below the chain pipe exit is maximized. Remember that rope coils unlike chain, and will require as much anchor locker space as possible (See drawings **P 6** and **P 7**).

Place the Windlass Deck Unit in position and connect the Gear Box/Motor. Fit the shaft into the Gear Box while aligning the key into the keyway. Align the deck bolts to the holes in the gear box flange and push firmly to the underside of deck. It may be necessary to move the motor/gear box up and down the shaft to make sure the grease is completely covering the entire shaft. Apply thread locker to exposed threads and assemble with stainless steel hardware supplied. After installation: Use anti corrosion marine protection on the motor and gearbox. See photo **P 2**.

WIRING DATA:

ELECTRICAL: See the appropriate wiring diagram for the correct electrical installation of your windlass model.

WARNING!

Always use a circuit breaker to protect the windlass motor and electrical cables.

Cable sizes


We recommend the use of the following cables, switch-wiring and circuit breaker sizes:

Windlass	Cable length: 0-8m 0-24ft		over 8m 24ft		Circuit Breaker
Barracuda 600	16mm ²	4-6AWG	25mm ²	4AWG	80amp (90080)
Barracuda 900	25mm ²	4AWG	35mm ²	4AWG	100amp (90100)
Dolphin 1000	25mm ²	4AWG	35mm ²	2AWG	100amp (90100)
Mako 1500 12v	35mm ²	2AWG	50mm ²	2AWG	135amp (90135)
Mako 1500 24v	25mm ²	2AWG	35mm ²	2AWG	80-100amp (90080-90100)
Aquarius 2500 24v	35mm ²	2AWG	50mm ²	0AWG	135amp (90135)
Aquarius 3000 24v	35-50mm ²	2-0AWG	50mm ²	0AWG	175amp (90175)


Note:

- A) Cable and terminals should be suitable sizes.
- B) Windlass performance is directly related to cable size and length.
- C) Voltage drop over the wiring run must not exceed 2 volts.

Electrical connections 2 wire motor.

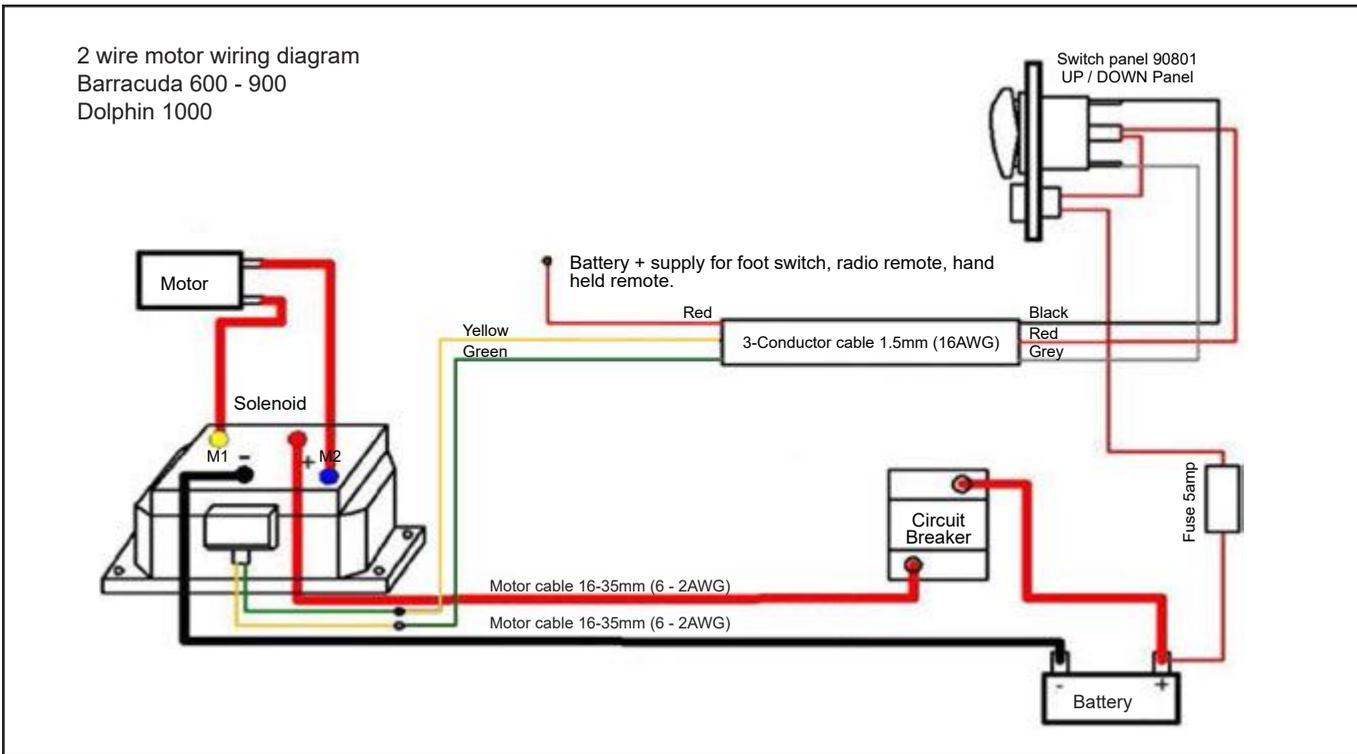


Electrical connections 3 wire motor.

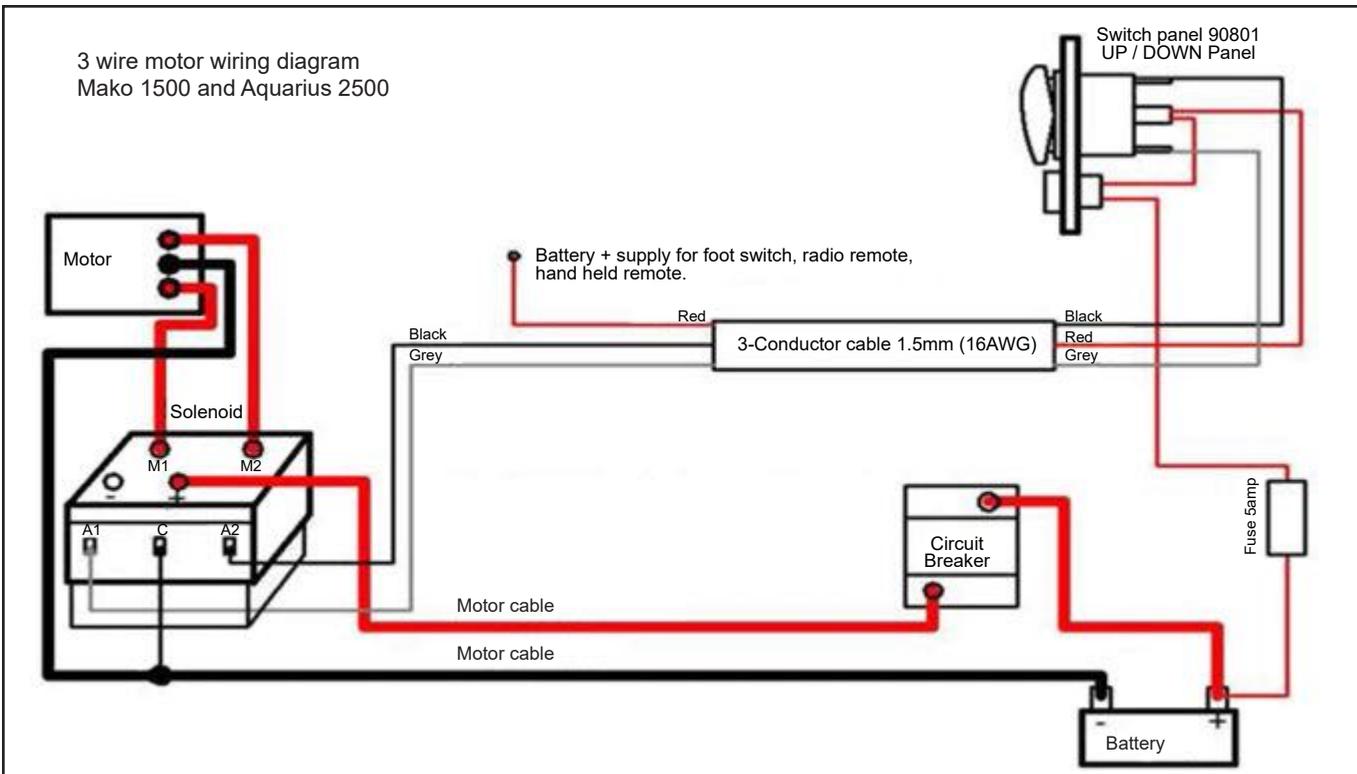


WARNING

MAKE SURE THE ELECTRICAL POWER IS SWITCHED OFF BEFORE WORKING WITH ELECTRIC CABLES.

Motor boat installation using the vertical low profile windlass model with 2 wire motor.

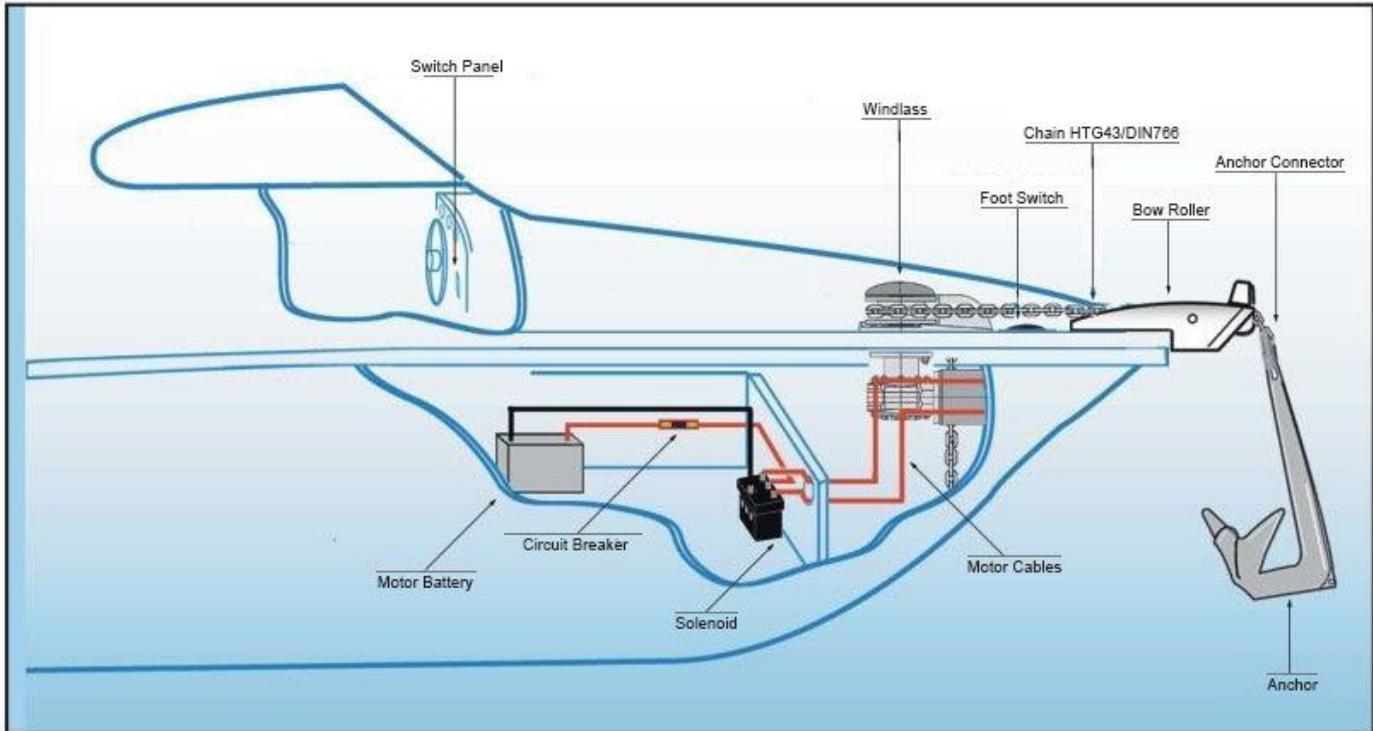


Sail boat installation using the vertical low profile windlass model with 3 wire motor.

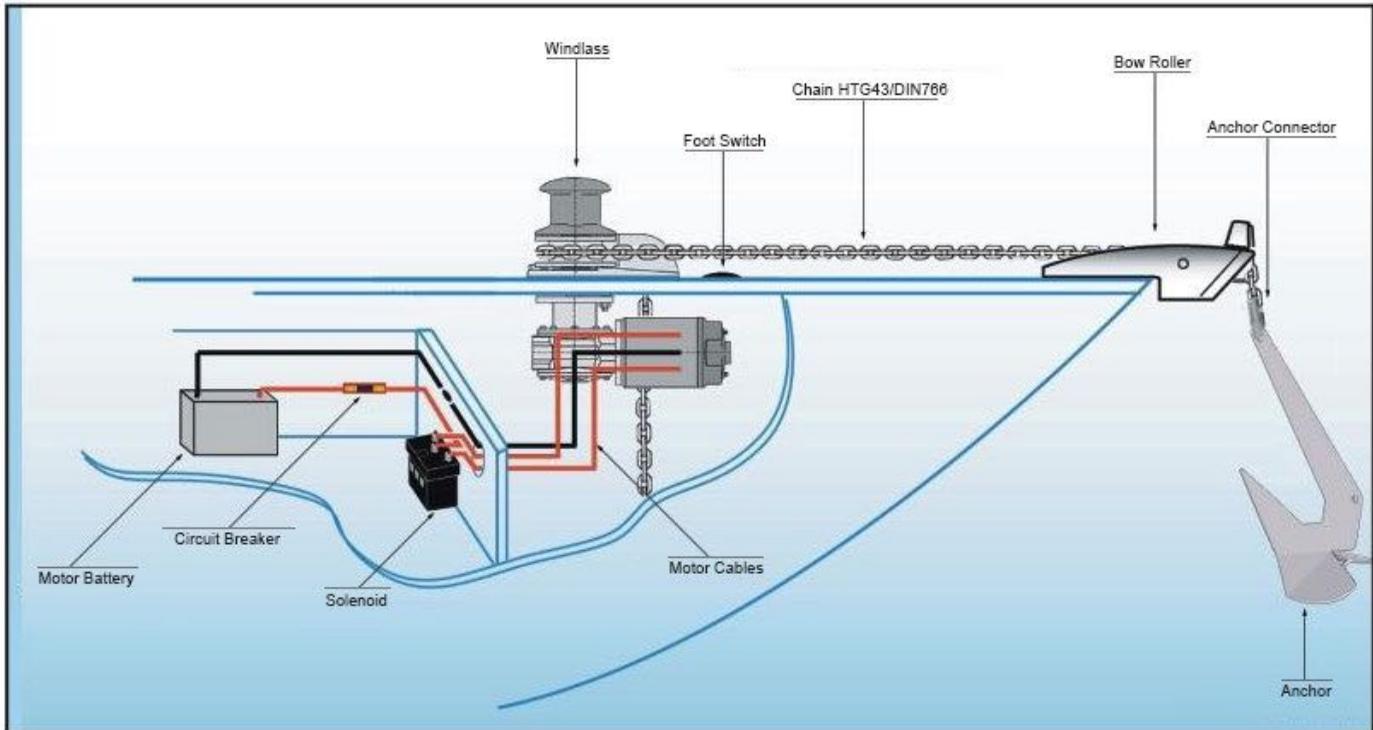

ITEM DESCRIPTION

- 1 Chain pipe cover
- 2 Pin
- 3 Pressure finger
- 4 Spring
- 5 Base
- 6 Base bolt
- 7 Rope fork (2 styles)
- 8 Cover bolt
- 9 Key
- 10 Gypsy shaft
- 12 Clip - 1
- 13 Bearing
- 14 Clip - 2
- 15 Oil seal
- 16 Washer
- 17 Clutch cone
- 18 Gypsy
- 19 Gypsy top cap
- 20 Capstan
- 22 Clutch handle

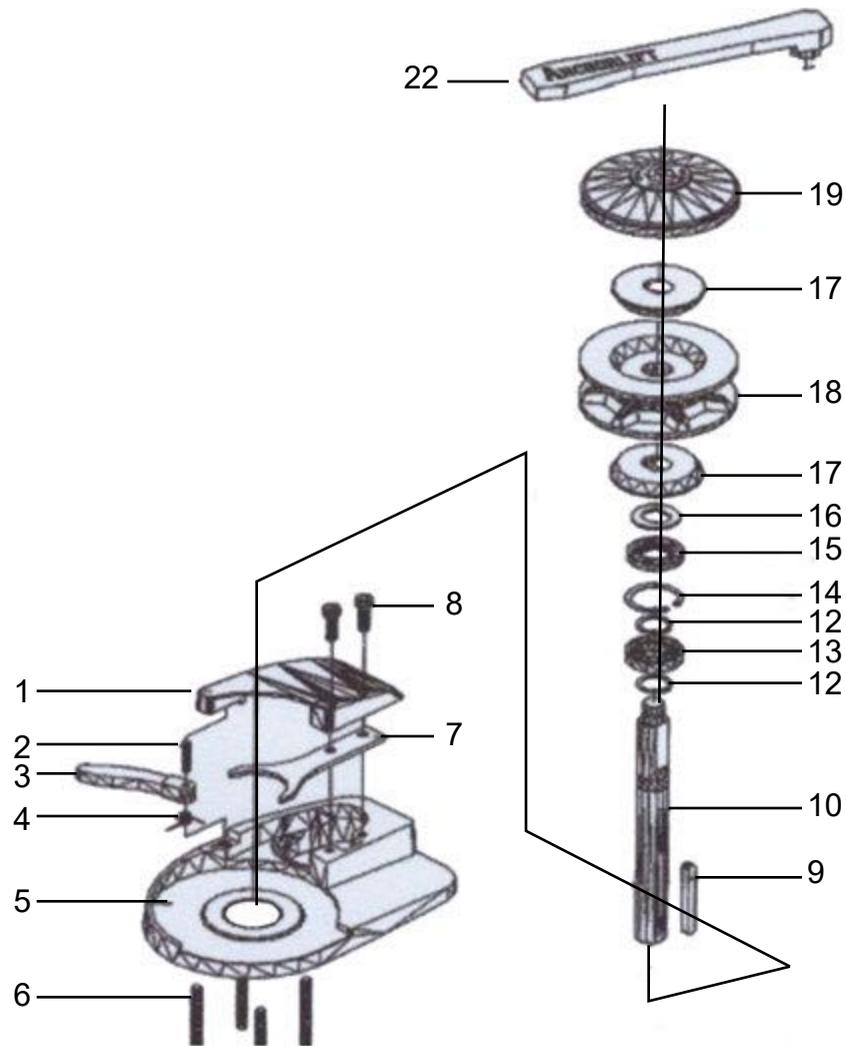

Basic maintenance and cleaning needs to be performed to keep this unit working properly:

Recurring: Any salt deposits must be removed to avoid corrosion and damage to the equipment. Wash thoroughly with fresh water after each use. Polish the unit to prevent staining using auto polish or stainless steel cleaner.

Once a year: Remove the top cap and gypsy and perform required maintenance:

Use the handle (22) to remove the Gypsy Top Cap (19). Remove the top Clutch Cone (17), loosen the Cover bolts (8) on the Chain Pipe Cover (1) and remove both parts. Pull away the Pressure Finger (3) from the Gypsy (18) and remove the Gypsy. Remove bottom Clutch Cone (17).

Clean all the parts to prevent corrosion and grease the Shaft (10) and Gypsy (18) where the clutch cones seat (17). Use suitable marine grease ONLY! Reassemble following the instructions and drawings above.

WARNING

MAKE SURE THE ELECTRICAL POWER TO THE MOTOR IS SHUT OFF WHEN WORKING ON THE WINDLASS.
 CAREFULLY REMOVE THE CHAIN OR ROPE FROM THE GYPSY.

Anchorlift windlasses are designed to operate using chain only and chain/rope combinations. The table below shows a selection of chain and rope that is specified for each model. Note: Chain specification is HT G43 Windlass Chain. Rope specification is 8 – 24 plait, double braided.

Visit anchorliftdirect.com for additional information regarding correct chain / rope / rode kit combinations for your model.

NOTE: Before use, make sure that you have the correct gypsy for the chain or chain/rope combination you have chosen.

Rope:

Model:	Gypsy:	Rope:
Barracuda	1/4"	1/2"
Dolphin	5/16"	9/16" - 5/8"
Mako	5/16" + 3/8"	5/8"
Aquarius	3/8" + 1/2"	N/A

Chain: USA and Canada Standard:

Model	Size	Weight ft	Dimensions inside	Breaking load	Windlass Model
HT1/4"	1/4"	0.74 lbs	0.845 x 0.41"	6700 lbs	Barracuda
HT5/16"	5/16	1.03 lbs	1.03 x 0.51"	8900 lbs	Dolphin Mako
HT3/8"	3/8"	1.48 lbs	1.22 x 0.59"	13500 lbs	Mako Aquarius
HT1/2"	1/2"	2.57 lbs	1.59 x 0.76"	25000 lbs	Aquarius



Original chain HTG43

USA and Canada Standard Galvanized ISO HTG43 Chain

Part Number	Rope	Length	Chain	Length	Total	Fits Windlass
DB1/2-150	1/2"	150ft	1/4"	15ft	165ft	Barracuda
DB1/2-200	1/2"	200ft	1/4"	15ft	215ft	Barracuda
DB1/2-250	1/2"	250ft	1/4"	20ft	270ft	Barracuda
DB1/2-300	1/2"	300ft	1/4"	20ft	320ft	Barracuda
DB5/8-150	5/8"	150ft	5/16"	15ft	165ft	Dolphin / Mako
DB5/8-200	5/8"	200ft	5/16"	15ft	215ft	Dolphin / Mako
DB5/8-250	5/8"	250ft	5/16"	20ft	270ft	Dolphin / Mako
DB5/8-300	5/8"	300ft	5/16"	20ft	320ft	Dolphin / Mako
DB3/8-150	5/8"	150ft	3/8"	15ft	165ft	Mako
DB3/8-200	5/8"	200ft	3/8"	15ft	215ft	Mako
DB3/8-250	5/8"	250ft	3/8"	20ft	270ft	Mako
DB3/8-300	5/8"	300ft	3/8"	20ft	320ft	Mako

Type 316L Stainless Steel Grade S4 Chain

SSDB1/2-150	1/2"	150ft	1/4"	15ft	165ft	Barracuda
SSDB1/2-200	1/2"	200ft	1/4"	15ft	215ft	Barracuda
SSDB1/2-300	1/2"	300ft	1/4"	20ft	320ft	Barracuda
SSDB5/8-200	5/8"	200ft	5/16"	15ft	215ft	Dolphin / Mako
SSDB5/8-250	5/8"	250ft	5/16"	20ft	270ft	Dolphin / Mako
SSDB3/8-300	5/8"	300ft	5/16"	20ft	320ft	Dolphin / Mako
SSDB3/8-200	5/8"	200ft	3/8"	15ft	215ft	Mako
SSDB3/8-250	5/8"	250ft	3/8"	20ft	270ft	Mako
SSDB3/8-300	5/8"	300ft	3/8"	20ft	320ft	Mako



Limited Product Warranty

Lynch Industries, LLC dba AnchorLift™ and AnchorLift Direct™ warrants to the original purchaser that your purchase (the "Product") shall be free from defects in materials and workmanship under normal use for a period of five (5) years from the date of purchase. AnchorLift Direct does not warrant that the operation of the Product will be uninterrupted or error-free. AnchorLift Direct is not responsible for damage arising from failure to follow instructions relating to the Product's use. 5 year limited warranty applies to the following AnchorLift Direct products: Windlass Head Units, Bow Rollers, Swivels and Turners. 1 year limited warranty applies to: Motors and Gear Boxes. This limited warranty does not cover normal wear parts. Limited Lifetime Warranty applies to Anchors only and warrants that the product will be free from material defects in and failure of material and workmanship from the date you purchase the product by original purchaser. Warranties are not transferable. Electrical parts such as, but not limited to solenoids, switches, circuit breakers, remote controllers and combo packs are not covered by warranty. This Limited Warranty does not cover the technical services provided by AnchorLift Direct to owners of the Product.

Remedies

If a manufacturing defect arises and a valid claim is received by AnchorLift Direct within the Warranty Period, AnchorLift Direct will, at its option and to the extent permitted by law, either (1) repair the Product at no charge, using new or refurbished replacement parts or (2) replace the Product with a new or refurbished Product, these are your sole and exclusive remedies. Shipping and handling charges may apply except where prohibited by applicable law. This Limited Warranty is valid only in the jurisdictions where the Products are sold by AnchorLift Direct itself or through its authorized resellers or agents and is valid to the extent permitted by the applicable laws of such jurisdictions. Any replacement product will be warranted for the remainder of the original warranty period or thirty (30) days, whichever is longer, or for any additional period of time that may be applicable in your jurisdiction.

How to Obtain Warranty Service

To obtain warranty service, you must obtain an RMA number (Return Materials Authorization Number) and deliver the Product, in either its original packaging or packaging providing an equal degree of protection, to the AnchorLift Direct address below:

Anchorlift Direct
830 NE 24th Lane, Unit #F
Cape Coral, Florida 33909 USA

In accordance with applicable law, AnchorLift Direct requires that you furnish proof of purchase details and/or comply with registration requirements before receiving warranty service. For specific instructions on how to obtain warranty service on your Product, visit the AnchorLift Direct website (www.anchorliftdirect.com).

Additional Terms and Conditions

Shipping and handling charges and taxes paid (e.g., state, customs, VAT) are not refundable.

You are responsible for, and must prepay, all shipping charges and you shall assume all risk of loss or damage to the Product while in transit to Anchorlift Direct. We recommend purchasing INSURANCE for your return to cover the purchase price or value of the item.

If you return Product to Anchorlift Direct a) without an RMA from Anchorlift Direct or (b) without all parts included in the original package, Anchorlift Direct retains the right to either refuse delivery of such return or charge a restocking fee of 25% of the original price of the product or the retail value of the missing accessories, whichever is higher.

Refunds will be processed and paid within 2 weeks of Anchorlift Direct's receipt of Product.

A restocking fee of 25% of the original purchase price of the product will be charged for returns received after 30 days from original date of purchase.

Exclusions and Limitations

This Limited Warranty applies only to the Product(s) manufactured by or for AnchorLift Direct that can be identified by the "AnchorLift" or "Salt Gear" trademark, trade name, or logo affixed to it. The Limited Warranty does not apply to any anchorliftdirect.com products and services other than the Product

This warranty does not apply to a Product or part of the Product that has been altered or modified (e.g., to alter functionality or capability) by anyone who is not a representative of AnchorLift Direct. In addition, this Limited Warranty does not apply: (a) to damage caused by use with non-AnchorLift Direct products; (b) to damage caused by accident, abuse, misuse, flood, fire, earthquake or other external causes; (c) to damage caused by operating the Product outside the permitted or intended uses described by AnchorLift Direct or with improper voltage or power supply. Natural wear and tear to the windlass models and windlass accessories is not covered by the Warranty. This Warranty does not apply to products that were damaged due to negligence, improper installation, improper use or any other actions not specified. Windlasses should not be used to haul the seabed to the boat or drag the boat to the anchor. This Warranty shall be voided if the equipment is altered or repaired by unqualified personnel. AnchorLift Direct is not responsible for any damages to the gear/motor or any other parts caused by AnchorLift Direct windlass models & accessories.

No Anchorlift reseller, agent, or employee is authorized to make any modification, extension, or addition to this Limited Warranty. If any term is held to be illegal or unenforceable, the legality or enforceability of the remaining terms shall not be affected or impaired.

Natural wear and tear to the windlass models and windlass accessories is not covered by AnchorLift Direct's 5-Year Warranty. This Warranty does not apply to products that were damaged due to negligence, improper installation, improper use or any other actions not specified by AnchorLift Direct. Windlasses should not be used to haul the seabed to the boat or drag the boat to the anchor. The proper way is motoring up to the anchor and use the boat to "break" loose the anchor. If the boat is heavy for its size or is commercially used, please go up a size when choosing a windlass. This Warranty shall be voided if the equipment is altered or repaired by unqualified personnel. AnchorLift Direct's 5-Year Warranty does not include rope/chain combinations.

Implied Warranties

EXCEPT TO THE EXTENT PROHIBITED BY APPLICABLE LAW, ALL IMPLIED WARRANTIES (INCLUDING WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE) SHALL BE LIMITED IN DURATION TO THE DURATION OF THIS LIMITED WARRANTY. Some jurisdictions do not allow limitations on the duration of an implied warranty, so the above limitation may not apply to you.

Limitation of Damages

Except to the extent prohibited by applicable law, AnchorLift Direct, shall not be liable for any incidental, indirect, special, or consequential damages, including but not limited to loss of profits, revenue or other, resulting from any breach of express or implied warranty or condition, or under any other legal theory, even if AnchorLift Direct has been advised of the possibility of such damages. Some jurisdictions do not allow the exclusion or limitation of special, indirect, incidental or consequential damages, so the above limitation or exclusion may not apply to you.

Governing Law

This Limited Warranty shall be governed by the laws of the State of Florida, USA, without giving effect to any conflict of laws principles that may provide the application of the law of another jurisdiction.

National Statutory Rights

Consumers in some jurisdictions may have legal rights under applicable national legislation governing the sale of consumer goods, including, without limitation, national laws implementing EC Directive 99/44. These rights are not affected by the warranties in this Limited Warranty.

Complete Windlass System

Barracuda
Boats to: 35ft



90101
Anchors: Up to 8kg/17lbs



90102
Anchors: Up to 15kg/33lbs



90103
Anchors: Up to 20kg/44lbs



90104
Anchors: Up to 30kg/66lbs



90105
Anchors: Up to 50kg/110lbs



90126
Anchors: Up to 15kg/33lbs



90127
Anchors: Up to 30kg/66lbs



90128
Anchors: Up to 50kg/110lbs



XR Anchors Boats 20 – 90 ft.
Solid Stainless Steel
Sizes: 5kg / 11lbs to 80kg / 176lbs
Lifetime Warranty



CX Anchors Boats 20 – 90 ft. Solid
Stainless Steel
Sizes: 15kg / 33lbs to 80kg / 176lbs
Lifetime Warranty



TPX Anchors Boats 20-90 ft.
Solid Stainless Steel
Sizes: 6 kg / 13.2 lbs to 120 kg / 264 lbs
Lifetime Warranty



Control Units

90801



90800



90900B



90080-90175



90503



90501



Autodrop 4 channel Radio Remote 91354



Rope Chain Combo
Double Braid Polyester Rope
Galvanized or Stainless steel chain
1/4" chain 1/2" rope
5/16" chain 9/16" rope
5/16" chain 5/8" rope
3/8" chain 5/8" rope



Chain to anchor swivel connectors

- 964408 Chain**
5-6-7mm 1/4"
- 964410 Chain**
8-10 5/16-3/8"
- 964411 Chain**
10 3/8"
- 964412 Chain**
10-14mm 3/8-9/16"
- 964420 Chain**
16-20mm 5/8-3/4"



Bow Plank Rollers



90113, 90114 & 90115